





OG-50 Oxygen Generator

50 SCFH (23.60 LPM) @ up to 45 PSI (3.1 bar) - Stand alone or part of complete Oxygen Generator System (OGS)

"The industry standard state-of-the-art PSA twin tower generator"

AMERICAN-MADE, DEPENDABLE, INDUSTRIAL STRENGTH O2 GENERATOR

NOVAIR's industry standard oxygen generators utilize the longstanding, highly safe PSA (Pressure Swing Adsorption) process that separates gases in the air, ejecting nitrogen while leaving high purity oxygen for a variety of medical and industrial applications. Quickly start producing your own oxygen in-house for just the price of electricity. End oxygen delivery forever while ensuring you always have 93% +/-3% oxygen concentration at 45 psi pressure, wherever and whenever you need it.

tower" tanks filled with zeolite sieve to separate air

Durable "twin

Feed air gauge and oxygen pressure gauge monitoring dials inside.

Customized input and output options with ability to create a comprehensive "Oxygen Generating System (OGS)" to meet your specific needs

ADVANTAGES:

- Savings Get a large return on investment in mere months
- Autonomy End delivery, free yourself from constant O2 rate hikes
- **Reliability** Works tirelessly in many settings, low maintenance
- Safety No dangerous cylinder transport or worker's comp scares
- **Eco-friendly** Green technology that lowers your carbon footprint

KEY FEATURES:

- Produce up to 50 standard ft³ per hour of O2 right in-house, for less
- Output of 93% +/-3% oxygen concentration, continuous flow setting
- Expertly-sealed durable 'twin tower' zeolite sieve beds
- Reliable leading-edge PSA tech, quality-tested and built to last
- Extremely low power consumption, plugs into any 115 VAC power outlet, with 230 VAC input power available at no additional cost
- Worry-free safety features built-in, easy to monitor and maintain
- Can be configured into tailored 'oxygen generating system' (OGS)











Compact skid mount prevents accidents

Easy oxygen output, with options.

Compatible with any normal electrical outlet to just plug-in and start making oxygen for less than delivery



OG-50

AUTONOMY RELIABILITY







OG-50 OXYGEN GENERATOR

PRODUCT DATA SHEET



OG-50 TECHNICAL DATA		
Maximum oxygen flow		50 SCFH (23.6 LPM) (1.4 Nm3/hr)
Output oxygen pressure		Up to 45 PSI (3.1 bar)
Sound level		70 dB(A) at 3 ft (1 m)
Power supply 11	5 VAC, 60	Hz, 1 Phase, 0.5 A (230 VAC, 50/60 Hz avail.)
Operating temp		Min: 40 °F (4.4 °C), Max: 90 °F (32.2 °C)
Oxygen outlet fitting		3/8" FNPT
Oxygen dew-point		-60 °F (-51 °C)
Approximate weight		275 lbs. (125 kg)
Storage tank size		60 Gallons (227 Liters)
Oxygen concentration		93% +/- 3%
Carbon dioxide limit		≤ 300 ppm
Carbon monoxide limit		≤ 10 ppm
Dimensions 20" W x 14" D x 63" H (x 14" D x 63" H (50cm W x 36cm D x 160cm H)


SPECIFICATION NOTES

- Pressure vessels are designed to meet ASME code (section VIII, Div. 1)
- Generators come standard with a 10 ft. flexible inlet air hose and a 10 ft. flexible oxygen outlet hose
- Additional options available -- please speak with a representative to learn more

TYPICAL APPLICATIONS

- Hospital Systems
- Veterinary Facilities
- Waste Gas Remediation
- Metal Forming, Cutting, Brazing
 Biogas, Semicon, and more
- Ozone Feed Gas
- Fish Farming
- Wastewater Treatment

OXYGEN GENERATING SYSTEM 50 (OGS-50) TYPICAL INSTALLATION

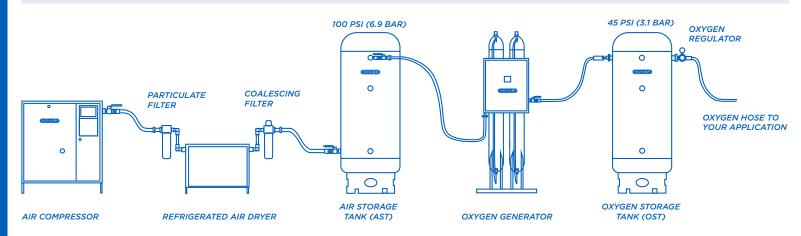

*Disclaimer: NOVAIR's Oxygen Generator (OG) series is not FDA cleared for direct connection to a human healthcare facility oxygen delivery system or for human patient direct use in the USA OG operators in human healthcare facilities are wholly accountable for registration as a pharmaceutical manufacturer and for all necessary related quality and safety testing NOVAIR may assist in set-up and operation of our equipment, but such assistance does not constitute a guarantee of safety and performance related to human medical use of the oxygen generated. For guidance, please visit https://www.fda.gov/media/70973/download

OG50-DT ©6-2-2025 NOVAIR, non-contractual document, all rights reserved.

